

**Continuous Ink Supply System  
for  
CANON PIXMA IP3000**

**Installation Instruction**

**For DP Prefilled Version**

**With Original Chips**

This Version of the Continuous Ink Flow System comes with Prefilled Cartridges and Auto Reset Chips. You just need to fill the Reservoir bottles and print! The whole operation is very easy. It's really an effective tool to save your money.

## CIS for CANON PIXMA IP3000 Instruction

Thank you for purchasing DP Continuous Ink Supply System. We appreciate your support and will try our best to make your experience with our products a pleasant one. Printing has been a different experience ever since you installed DP Continuous Ink Supply system on your own printer. Just imagining being able to print without regard to the ink level in those expensive little cartridges.

Please take your time installing DP Continuous Ink Supply system. Do not remove your old cartridge until you have the DP CIS system primed and ready to install (to prevent the drying of heads). In addition, make sure you are getting perfect nozzle checks before installing the DP CIS system. The DP CIS system won't be able to work properly if the nozzles are previously clogged.

Most people get a perfect nozzle check the first time after installing the DP Continuous Ink Supply system; others may need to run two or three cleaning cycles or let the printer sit for a while before they get the perfect results.

### 1. General Guide:

#### 1) Components

A. CIS system	1 set
B. Air filters	4 pcs
C. Support Arm	1 set
D. Refill Kit	4 pcs
E. Instruction CD	1 pc



#### 2) Opening box inspection

a. Check whether all the accessories are ready.

b. Check whether there's the leakage of the CISS, whether some tubes have been separated from the CISS, whether there are air bubbles in the tube (If there exists more than 20CM air space, please kindly to contact with the local dealer)

### 2. Printer testing:

- 1) Check whether the printer is in normal condition, like mechanical status, lubrication status etc.
- 2) Print testing lines to ensure the printing head is good condition.
- 3) Print pictures to see whether the printing image is ok.

### 3、 Installation Procedures:

#### 1) First step



Put the CISS on the left side of the printer and place all the tubes at correct position.



Pull out the small rubber plug from the air hole as picture shown above.



Place 4pcs of air filters into air holes,

#### 2) Second step: Remove the original cartridges



Turn on power.



Open the printer cover, move the cartridge Carriage to "cartridge replace position". Take out the original cartridges



Turn off the printer and unplug it.

#### 3) Step 3: Install the Continuous Ink Supply System



Remove the bottom cap from CISS cartridges. Place them into cartridge carriage carefully. Fix the support arm, which should be 4 cm from the right edge of printer, place the tube through supporting arm as the picture shown above.



Move the cartridge car to both sides. Make sure that the tubes are not too tight or too loose.



Tube can't be distorted, otherwise ink can't flow smoothly.




Finished



Insert a scrip in the proper position as the picture shown above, so there is no need to close the printer cover.

#### 4. Filling ink

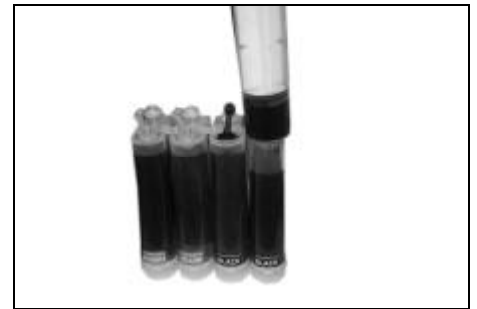

Please pay attention to the ink level in the reservoirs; if the ink level is below 1CM as the picture shown above, please use refill kits to fill ink into Reservoir bottles. Carefully pull out the rubber plugs from the ink refill holes (There is possibility of ink spattering. Pls be careful.) Refill ink according to the colors. Then re-cap the rubber. **(Please keep the printer and the reservoir bottles at the same horizontal line during the process of refilling ink.)**

#### 5. Attention for Maintenance:

Take out the CISS including the inner cartridges and other components. Then remove support arm from printer, and re-install original cartridges. Please inquire local dealer before sending to maintenance.

#### 6. Notice:

1. Please don't take out cartridge at random after installing the CIS system. Keep the reservoir bottles on the same level with the printer.
2. Try to keep at least 1/2 inch of ink in the bottles.
3. Don't place the Reservoir Bottles too much higher or lower than the printer.
4. Suggested using in a dry place between 15 and 35 degree. Avoid exposure to direct sunlight.
5. Don't reverse or lean the continuous ink supply systems during shipping. Please make sure all the ink filling holes and ventilation holes are closed tightly during transportation. Otherwise, the ink may leak.
6. Don't sway the cartridge frequently. It may cause ink leakage.
7. Don't pull out the connector of cartridge and don't tear off adhesive tape at the bottom of cartridge.

#### 7. Warning:

1. Not drinkable; keep it out reach of children.
2. Avoid exposure to direct sunshine and don't keep it in high or freezing temperature.
3. Avoid collision and fallen down.