

Continuous Ink Supply System for HP Photosmart 8250

Instruction

For ST Prefilled Version

With Auto Reset Chips

This Version of the Continuous Ink Flow System comes with Prefilled Cartridges and Auto Reset Chips. You just need to fill the Reservoir bottles and print! The whole operation is very easy. It's really an effective tool to save your money.

1. General Guide:

1) Components

- A. Continuous ink supply system: 1set B: Air filter: 6pc
C. Supporting arm: 1set D: Refill kits: 6pcs



2) Opening box inspection

- Check that all above components are present.
- Check for any leakage in the CIS unit.
- Ensure that no tubes have been separated from the CIS

2. Installation Procedure:



Place the CIS on the right side of the printer.



Open the air hole of the ink tank.



Install the air filter.




Open the top cover, take out the original cartridges.



Before you install the CIS cartridges, pls make clear the chip location and make sure that each color cartridge will be installed in the correct location.




Install the CIS cartridges from left to right.

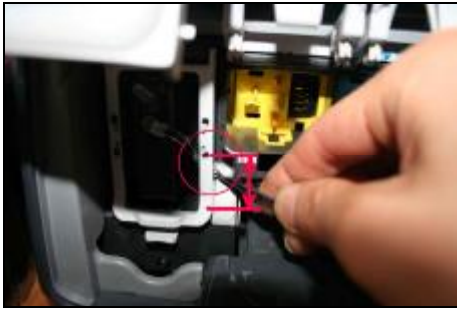

Close the top cover. Thread the tube from the Clip.



Tear the tubes among the cartridges about 2 cm it will be easier to install the color cartridges.

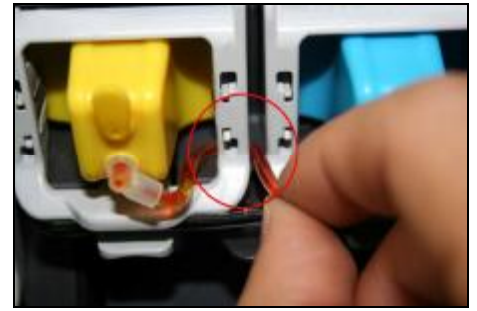

Make sure the tube line between each two clips are not folded. Pull the tube slightly to see if it is installed well.



Install the other cartridges according to above operation.



Stick the support arm on the printer to fix the the tube line.



Installation finished.

Remarks:

1. When printing, it is normal case that there are air bubbles in the tube line as long as the ink in the tube line can move. When the printer remind you the cartridges runs out of ink and the printer can not work, please turn off the printer for 1 minutes and then turn it on to reset the chip.
2. The ink should not be full prefilled, for 80% is ok, otherwise the ink will spill over when printing.

3. Refill ink



Please pay attention to the ink level in the reservoirs; if the ink level is below 1CM as the above picture shown, please use refill kits to fill ink into Reservoir bottles. Carefully pull out the rubber plugs from the refill holes.(there is possibility of ink spattering. Be careful!) Refill ink according to the color in short supply. Then put the rubber back. (Please keep the printer and the reservoir at the same horizontal line during the process of refilling ink.)

4. Attention for maintenance:

Take out the CISS including the inner cartridges and other components. Then remove support arm from printer, and place the original cartridges in. Please inquire local dealer before sending to maintenance.

5. Attention:

Please do not take the cartridges out at random after installing the CIS system.

Keep the reservoir bottles on the same level with the printer.

Try to keep at least 2cms of ink in the bottles, you don't want to run out of ink and draw air into the cartridge.

Do not place the Reservoir Bottles higher or lower than the printer.

Your printer should be used in a dry place between 15 and 35 degrees. Avoid exposure to direct sunlight.

Do not allow the continuous ink systems to be transported upside down or on an angle. Ensure all ink filling holes and ventilation holes are closed tightly during transportation to avoid leakage.

Do not shake the cartridges, this may cause ink leakage.

Do not attempt to remove the ink feeder tubes from either the cartridges or bottles.

6.Warning:

- Not Drinkable; keep it out reach of children.
- Avoid exposure to direct sunshine and avoid high or freezing temperatures.
- Avoid dropping the unit.